



300w V24 Slimline LED Flood Light

Product Features

- 300w
- 5000K
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 90° Symmetrical Beam Angle or 130/60° Asymmetrical Beam option
- 411 x 437 x 61mm
- Rating: IP66
- Weight: 5.45kg

Options:



Pole Mounted
Head Frames




Mounting Poles




Model	Watt	Size	CCT	Lumens	Beam Angle	Trim Colour	Weight
FL-300S-V	300w	411 x 437 x 61mm	5000K	47,764lm	90° Symmetrical	Black	5.45kg
FL-300A-V	300w	411 x 437 x 61mm	5000K	39,579lm	130/60° Asymmetrical	Black	5.45kg

300w V24 Slimline LED Flood Light

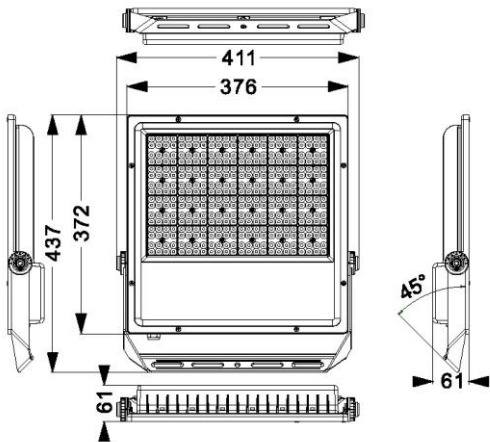


Mounting Holes




Lens Options:

Symmetrical Beam



Asymmetrical Forward Throw



Options:

Pole Mounted Head Frames



Single Model: SL-HF-1
Double Model: SL-HF-2
Triple Model: SL-HF-3
Available in Galvanised or PC options



Mounting Poles
Contact for options
Available in Galvanised or PC options

Poles and head frames are available in galvanised or powder coated finishes

Specification		
Model	FL-300S-V	FL-300A-V
Colour Temperature (1CCT)	5000K	5000K
Lumen (lm)	47,764lm	39,579lm
Efficiency (lm/w)	>163lm/w	>137lm/w
Light Source	LED	
CRI (%)	≥80	
Beam Angle	90°	130/60°
Lens Type	Symmetrical	Asymmetrical
Power Requirement	90~305VAC	
Power Consumption	291.4w	288.4w
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	411 x 437 x 61mm	
Impact Rating	IK08	
Weight	5.45kg	
Protection Rating	IP66	
Warranty	5 Years	