



## 200w STELLARO UFO LED High Bay Light

### Product Features

- 200w-150w-100w (Watt Select)
- Power input 120~277VAC
- Aluminium die cast housing
- Polycarbonate Lens
- 120° Beam Angle
- Supplied with 1.8m flex and plug
- Optional plug and play microwave motion sensor
- Ø280 x 146mm
- IP65 Housing
- Weight: 2.4kg



Options:



Microwave motion sensor




**WATT SELECT**  
LED HIGHBAY LIGHT




### Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
HB-STELLARO-V	100-150-200w	120~277VAC	5000K	16,538~29,898lm	120°	Black	Ø280x146mm

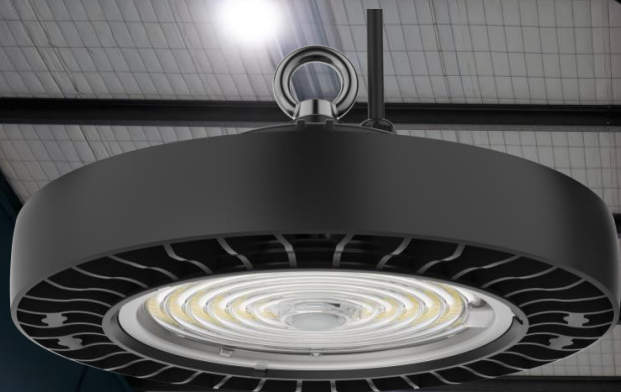

## 200w STELLARO UFO LED High Bay Light

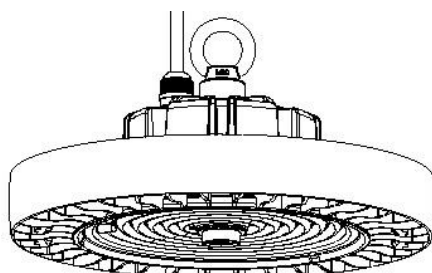

### Specification

Model	HB-STELLARO-V		
Colour Temperature	5000K		
Lumen (lm)	16,538lm	23,692lm	29,898lm
Efficiency (lm/w)	>166lm/w	>162lm/w	>151lm/w
Light Source	LED		
CRI (%)	≥80		
Beam Angle	120°		
Power Requirement	120~277VAC		
Power Consumption	99.5w	147.1w	197.4w
Dimmable	Yes, with optional motion sensor and remote control		
Housing	Diecast aluminium with Polycarbonate lens cover		
Lifespan	>50,000 hours		
Operation Temperature	-40°C~+50°C		
Product Dimension	Ø280 x 146mm		
Impact Rating	IK08		
Weight	2.4kg		
Protection Rating	IP65		
Warranty	5 Years		

Specifications are subject to change without notice

### Accessory options




Microwave Motion Sensor (plug and play)  
Model: HB-MMS-ANT54T



Remote Control for set-up of HB-MMS-ANT54T  
Model: HB-RC100





200w

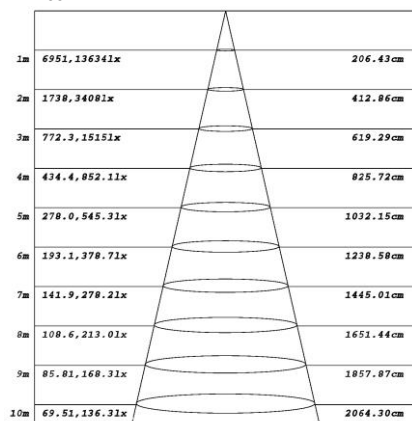



## Optional Plug and Play Microwave Sensor to suit

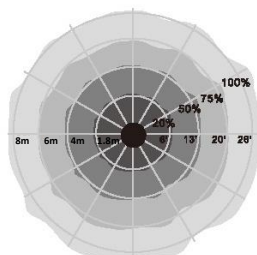

### Default factory setting

- Sensitivity: 100%
- Hold Time: 5min
- Daylight Sensor: Disabled
- Stand-By DIM Level: 30%
- Stand By Period: 60min

### Specification

Model	HB-MMS-ANT54T
Hardware Requirement	S-Tech STELLARO LED Highbay
Input Voltage	12-24VDC
Transmission Power	<0.2mW
Hold Time	10s, 1min, 5min, 10min, 15min, 20min, 30min, 60min
Stand-By DIM Level	0%, 10%, 30%, 50%
Stand-by Period	1min, 30min, 60min, +∞
Sensitivity	20%, 50%, 75%, 100%
Daylight Sensor	10lux, 30lux, 50lux, 100lux, 300lux, 500lux, Disable (ambient light detection) – No Daylight Harvesting Mode
Mounting Height	Max. 12m
Detection Angle	120° (ceiling mount)
Product Dimension	Ø30 x 111mm
Protection Rating	IP65
Warranty	5 Years

Specifications are subject to change without notice



## Optional Microwave Sensor Remote Control



### Specification

Model	HB-RC100
Hardware Requirement	S-Tech STELLARO LED Highbay
Input Voltage	12-24VDC
Transmission Power	<0.2mW
Hold Time	10s, 1min, 5min, 10min, 15min, 20min, 30min, 60min
Stand-By DIM Level	0%, 10%, 30%, 50%
Stand-by Period	1min, 30min, 60min, +∞
Sensitivity	20%, 50%, 75%, 100%
Daylight Sensor	10lux, 30lux, 50lux, 100lux, 300lux, 500lux, Disable (ambient light detection) – No Daylight Harvesting Mode
Mounting Height	Max. 12m
Detection Angle	120° (ceiling mount)
Product Dimension	Ø30 x 111mm
Protection Rating	IP65
Warranty	5 Years

#### Default factory setting

Sensitivity: 100%  
 Hold Time: 5min  
 Daylight Sensor: Disabled  
 Stand-By DIM Level: 30%  
 Stand By Period: 60min

Specifications are subject to change without notice